

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number  
**WO 2005/059317 A1**

- (51) International Patent Classification<sup>7</sup>: **F01D 17/14**, F02B 37/007, 37/18, F02C 6/12
- (21) International Application Number:  
PCT/EP2003/014013
- (22) International Filing Date:  
10 December 2003 (10.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **HONEYWELL INTERNATIONAL INC.** [US/US]; 101 Columbia Road, Morristown, NJ 07962 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **PERRIN, Jean-Luc** [FR/FR]; Honeywell Garret, Z.I Route d'Oncourt, Boîte postale 19, F-88150 Thaon Les-Vosges (FR). **FIGURA, Giorgio** [FR/FR]; Honeywell Garret, B.P. 19 - Z.I. Route d'Oncourt, F-88150 Thaon-Les-Vosges (FR).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VARIABLE NOZZLE DEVICE FOR A TURBOCHARGER

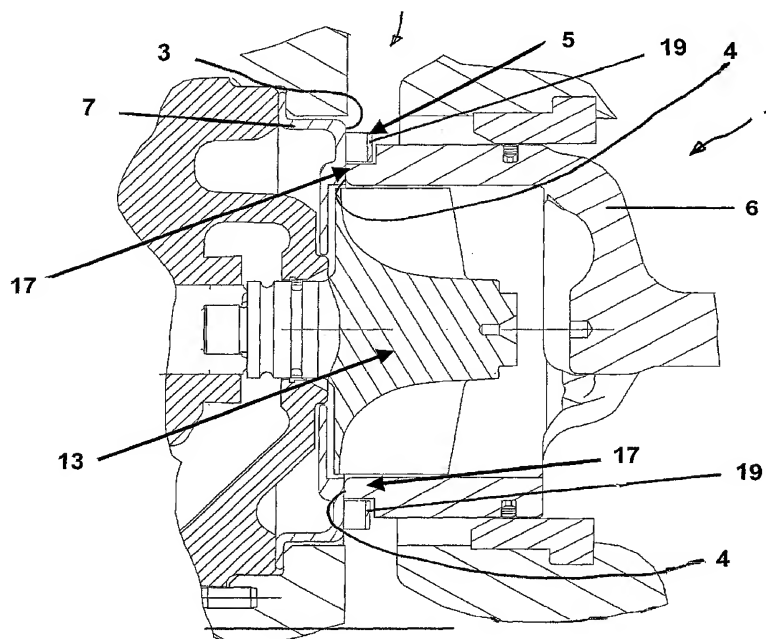

(57) Abstract: A nozzle device for a turbine of a turbocharger according to the present invention comprises variable annular nozzle (2) defined between an inboard wall (3) and an outboard wall (4), wherein said outboard wall (4) is axially movable for completely closing said variable annular nozzle (2).

WO 2005/059317 A1